


# DP-2604/08/16NI-E1(-E2)


## Embedded NVR

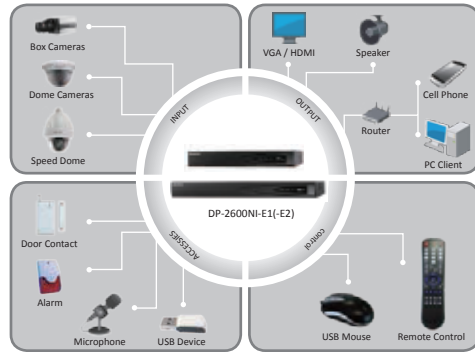

### Key features

- Third-party network cameras supported
- Up to 5 Megapixels resolution recording
- HDMI and VGA output at up to 1920×1080P resolution
- 4/8/16-ch network cameras can be connected with 25M/50M/100M incoming bandwidth
- Up to 2 SATA interfaces
- Support network detection, including network delay, packet loss, etc.

### Rear Panel of DP-2600NI-E1(-E2)

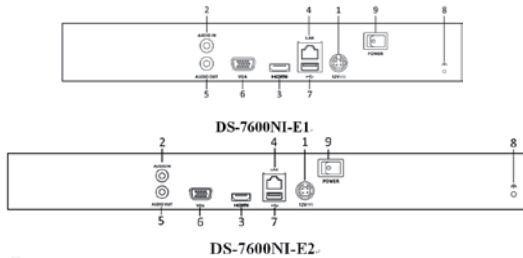

1. Power Supply
2. Audio In
3. HDMI Interface
4. LAN Network Interface
5. Audio Out
6. VGA Interface
7. USB Interface
8. Ground
9. Power Switch

	DP-2604NI-E1	DP-2608NI-E1	DP-2616NI-E1	DP-2608NI-E2	DP-2616NI-E2
<b>Video/Audio input</b>					
IP video input	4-ch	8-ch	16-ch	8-ch	16-ch
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1KΩ)				
<b>Network</b>					
Incoming bandwidth	25Mbps	50Mbps	100Mbps	50Mbps	100Mbps
Outgoing bandwidth	80Mbps				
Remote connection	128				
<b>Video/Audio output</b>					
Recording resolution	5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF				
Frame rate	Main stream: 50 fps (P) / 60 fps (N)				
	Sub-stream: 50 fps (P) / 60 fps (N)				
HDMI/VGA output	1-ch, resolution: 1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz				
Audio output	1-ch, RCA (Linear, 1kΩ)				
<b>Decoding</b>					
Live view / Playback resolution	5MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF				
Capability	4-ch@1080P	8-ch@720P, 6-ch@1080P	16-ch@4CIF, 12-ch@720P, 6-ch@1080P	8-ch@720P, 6-ch@1080P	16-ch@4CIF, 12-ch@720P, 6-ch@1080P
<b>Hard disk</b>					
SATA	1 SATA interface for 1 HDD			2 SATA interface for 2 HDDs	
Capacity	Up to 4TB for each disk				
<b>External interface</b>					
Network interface	1 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface				
USB interface	1 × USB 2.0 and 1 × USB 3.0				
Alarm in/out (Optional)	4 / 1				
<b>Others</b>					
Power supply	12V DC				
Consumption(without hard disk)	≤ 10W				
Working temperature	-10 °C ~ +55 °C (+14 °F~ + 131 °F)				
Working humidity	10 % ~ 90 %				
Chassis	1U chassis			380 chassis	
Dimensions(W × D × H)	315 × 230 × 45 mm (12.4 × 9.0 × 1.8 inch)			380 × 290 × 48mm (15.0 × 11.4 × 1.9 inch)	
Weight(without hard disk)	≤ 1 kg				